

LED SPOT DOWNLIGHTS

SERIES AD

- _Excellent build quality and finishing
- _Deep recessed & Honeycomb Louvre providing high Anti-glare mechanism
- _Citizen COB emitting rich light throughout its long lifespan
- _Step MAdam <3, ensuring strong colour consistency
- _Trim & Trimless options in Black and White colours
- _Fixed or Tilting Engine orientation
- _Quality Assurance: FIVE (5) year limited warranty



AFL - DLC 6W-9W



Electrical & Output Data

LED Type

CITIZEN

Lumen Output

620

CRI

Ra 80-90

Input Voltage

AC220 - 240V

IP Rating

IP54

Dimmable

Non Dim LIFUD Driver

Dimension

D95 H63 mm

Cut Segment

70 - 75mm

Beam Angle

30°

CCT

2700/3000/3500/4000/5000

Lifespan

>55000 hours

AFL - DLC 12W



Electrical & Output Data

LED Type

CITIZEN

Lumen Output

1100

CRI

Ra 80-90

Input Voltage

AC220 - 240V

IP Rating

IP54

Dimmable

Non Dim LIFUD Driver

Dimension

D111 H86 mm

Cut Segment

80 - 85mm

Beam Angle

24° / 36°

CCT

2700/3000/3500/4000/5000

Lifespan

>55000 hours

AFL - DLC 15W



Electrical & Output Data

LED Type

CITIZEN

Lumen Output

1500

CRI

Ra 80-90

Input Voltage

AC220 - 240V

IP Rating

IP54

Dimmable

Non Dim LIFUD Driver

Dimension

D119 H103 mm

Cut Segment

90 - 95mm

Beam Angle

15° / 24° / 38° / 60°

CCT

2700/3000/3500/4000/5000

Lifespan

>55000 hours

AFL - DLC20W25W



Electrical & Output Data

LED Type

CITIZEN

Lumen Output

2000 / 2500

CRI

Ra 80-90

Input Voltage

AC220 - 240V

IP Rating

IP54

Dimmable

Non Dim LIFUD Driver

Dimension

D142 H122 mm

Cut Segment

110 - 115mm

Beam Angle

20° / 36°


CCT

2700/3000/3500/4000/5000

Lifespan

>55000 hours

AFL - DLC30W35W

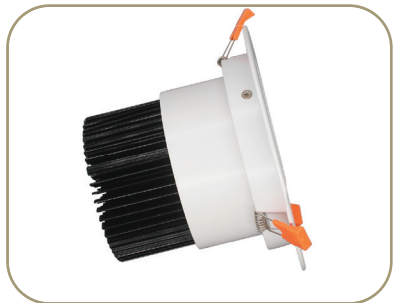

Electrical & Output Data

LED Type

CITIZEN

Lumen Output

3000 / 3300

CRI

Ra 80-90

Input Voltage

AC220 - 240V

IP Rating

IP54

Dimmable

Non Dim LIFUD Driver

Dimension

D180 H133 mm

Cut Segment

145 - 155mm

Beam Angle

15° / 24° / 38° / 60°

CCT

2700/3000/3500/4000/5000

Lifespan

>55000 hours

AFL - DLC45W



Electrical & Output Data

LED Type

CITIZEN

Lumen Output

4000

CRI

Ra 80-90

Input Voltage

AC220 - 240V

IP Rating

IP54

Dimmable

Non Dim LIFUD Driver

Dimension

D193 H134 mm

Cut Segment

158 - 165mm

Beam Angle

24° / 38° / 60°

CCT

2700/3000/3500/4000/5000

Lifespan

>55000 hours

AFL - DLC50W



Electrical & Output Data

LED Type

CITIZEN

Lumen Output

4500

CRI

Ra 80-90

Input Voltage

AC220 - 240V

IP Rating

IP54

Dimmable

Non Dim LIFUD Driver

Dimension

D193 H134 mm

Cut Segment

158 - 165mm

Beam Angle


24° / 38° / 60°

CCT

2700/3000/3500/4000/5000

Lifespan

>55000 hours

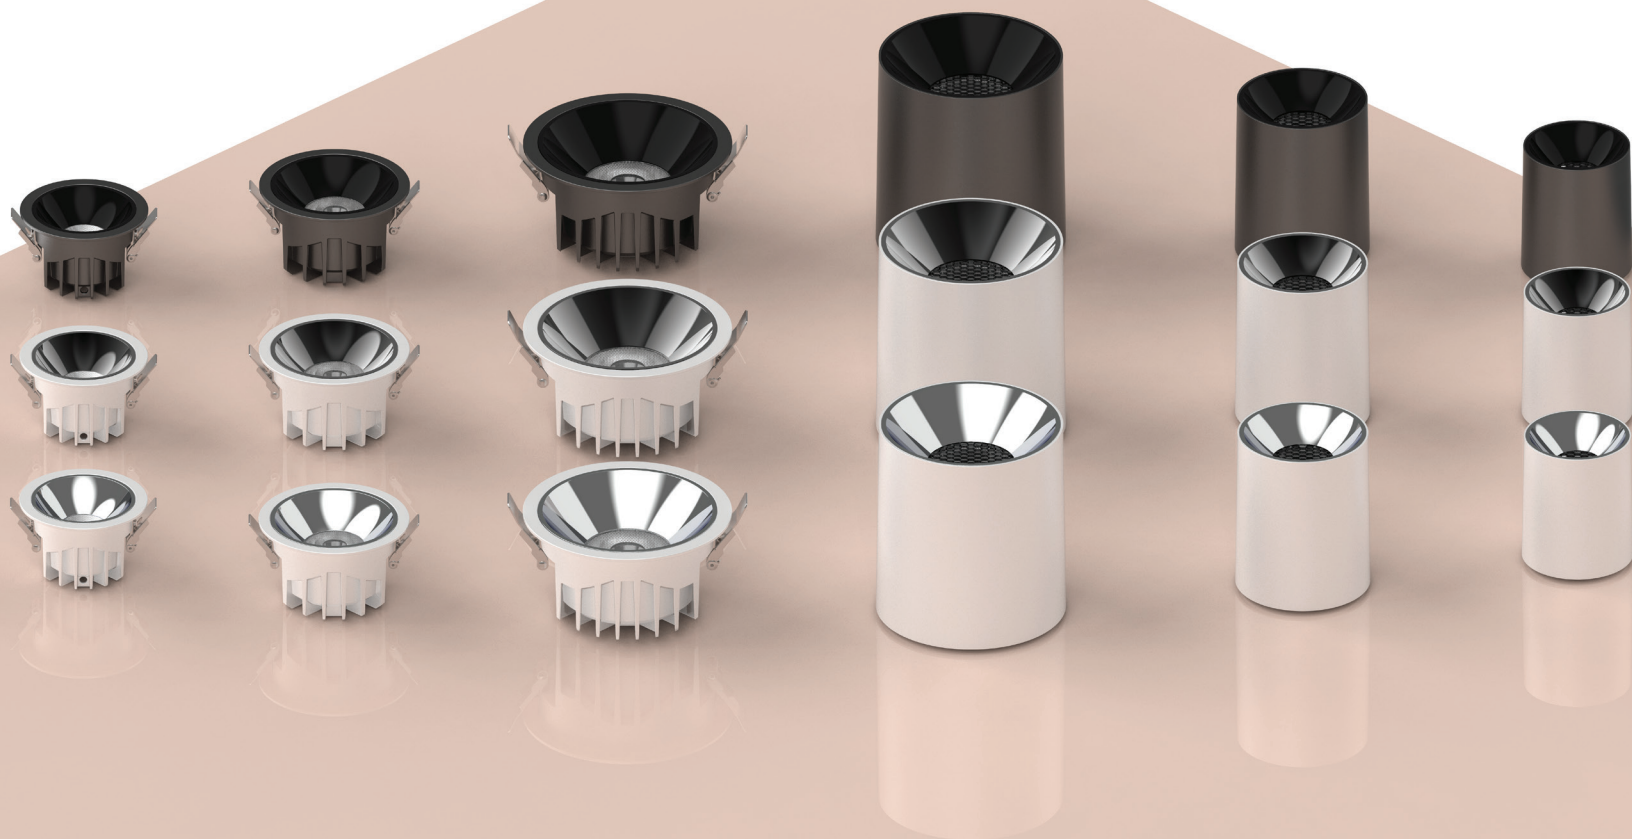







AFL - DL02 55A, 55B, 55C, 55D



62x62 / 82x82 / 105x105 mm



70x70 / 95x95 / 120x120 mm

Electrical & Output Data

LED Type

CITIZEN

Lumen Output

4500

CRI

Ra 80-90

Input Voltage

AC220 - 240V

IP Rating

IP54

Dimmable

Non Dimmable / Dim

Dimension

D62 H80 mm

Cut Segment

55 mm

Beam Angle

24° / 38° / 60°

CCT

2700/3000/3500/4000/5000

Lifespan

>55000 hours

AFL - DL02 55A, 55B, 55C, 55D, 55P, 55S



115x80 / 105x55

158x96 / 145x75



Electrical & Output Data

LED Type

CITIZEN

Lumen Output

4500

CRI

Ra 80-90

Input Voltage

AC220 - 240V

IP Rating

IP54

Dimmable

Non Dimmable / Dim

Dimension

D62 H80 mm

Cut Segment

55 mm

Beam Angle

24° / 38° / 60°

CCT

2700/3000/3500/4000/5000

Lifespan

>55000 hours